


Polymer Systems Technology Limited

UK & Ireland Distributor



© 2009 - Polymer Systems Technology Limited TM
Unit 2. Network 4. Cressex Business Park,
Lincoln Road, High Wycombe, Bucks. HP12 3RF
Phone +44 (0) 1494 446610
Fax: +44 (0) 1494 528611
Web: <http://www.siliconepolymers.co.uk>
Email: sales@silicone-polymers.co.uk

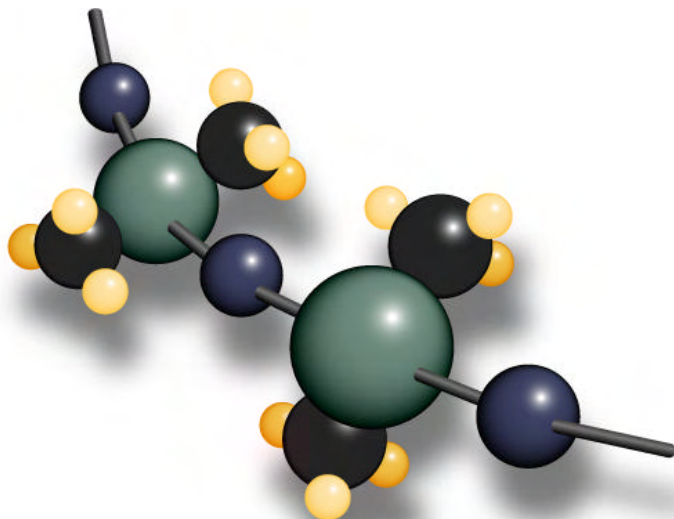

Product Profile



NuSil Technology LLC
1050 Cindy Lane • Carpinteria, CA 93013
805/684-8780 • 805/566-9905 Fax
www.nusil.com • silicone@nusil.com

An ISO 9001
Certified Company

MED-6021

Silicone Elastomer

Description

- Pourable, optically clear, two-part silicone
- 1:1 Mix Ratio (Part A: B)

Applications

- For molding of clear silicone parts, potting and coating applications

NuSil Technology's MED-6021 is a restricted product. It shall not be considered for use in human implantation for a period of greater than 29 days.

Typical Properties	Result	TEST REFERENCE	NT-TM
Uncured:			
Appearance	Translucent	D2090	002
Viscosity, Part A	4,000 cP (4,000 mPas)	D1084, D2196	001
Viscosity, Part B	2,000 cP (2,000 mPas)	D1084, D2196	001
Specific Gravity - Pycnometer, Part A	1.00	D891, D1475	022
Specific Gravity - Pycnometer, Part B	0.99	D891, D1475	022
Work Time	7 hours	-	008
Cured: 30 minutes @ 150°C (302°F)			
Durometer, Type A	20	D2240	006
Tensile Strength	275 psi (1.9 MPa)	D412	007
Elongation	150%	D412	007
Tear Strength	10 ppi (1.8 kN/m)	D624	009
Refractive Index	1.407	D1218, D1747	018

Properties tested on a lot-to-lot basis. Do not use the typical properties shown in this technical profile as a basis for preparing specifications. Please contact NuSil Technology LLC for assistance and recommendations in establishing particular specifications.

Instructions for Use

Mixing

Thoroughly stir individual parts prior to addition to ensure a homogenous mixture. Mix Parts A and B in a 1:1 ratio.

Vacuum Deaeration

Remove air entrapped during mixing by common vacuum deaeration procedure, observing all applicable safety precautions. Slowly apply vacuum, up to 28 inches of Hg, to a container rated for use and at least four times the volume of material being de-aired. Hold vacuum until bulk deaeration is complete.

Substrate Considerations

MED-6021 will cure in contact with most materials common to biomedical assemblies. Exceptions include sulfur-cured organic rubbers, latex, chlorinated rubbers, some RTV silicones and unreacted residues of some curing agents.

Adjustable Cure Schedule

Product cures at a wide range of cure times and temperatures to accommodate different production needs. Contact NuSil Technology LLC for details.

Packaging

2 Pint Kit (910 g)
2 Gallon Kit (7.28 kg)
10 Gallon Kit (36.4kg)

Warranty

12 Months

Warnings About Product Safety

NuSil Technology LLC believes the information and the data contained herein are accurate and reliable. However, the user is responsible to determine the material's suitability and safety of use. NuSil Technology LLC cannot know each application's specific requirements and hereby notifies the user that it has not tested or determined this material's suitability or safety for use in any application. The user is responsible to adequately test and determine the safety and suitability for their application and NuSil Technology LLC makes no warranty concerning fitness for any use or purpose. NuSil Technology LLC has completed no testing to establish safety of use in any medical application.

NuSil Technology LLC has tested this material only to determine if the product meets the applicable specifications. (Please contact NuSil Technology LLC for assistance and recommendations when establishing specifications.) When considering the use of NuSil Technology LLC products in a particular application, review the latest Material Safety Data Sheet and contact NuSil Technology LLC with any questions about product safety information.

Do not use any chemical in a food, drug, cosmetic, or medical application or process until having determined the safety and legality of the use. The user is responsible to meet the requirements of the U.S. Food and Drug Administration (FDA) and any other regulatory agencies. Before handling any other materials mentioned in the text, obtain available product safety information and take the necessary steps to ensure safety of use.

Specifications

Do not use the typical properties shown in this technical profile as a basis for preparing specifications. Please contact NuSil Technology LLC for assistance and recommendations in establishing particular specifications.

Patent Warning

NuSil Technology LLC disclaims any expressed or implied warranty against the infringement of any patent. NuSil Technology LLC does not warrant the use or sale of the products described herein will not infringe the claims of any United States' or other country's patents covering the product itself, its use in combination with other products or its use in the operation of any process.

Warranty Information

NuSil Technology LLC's warranty period is 12 months from the date of shipment when stored below 40°C in original unopened containers. Unless NuSil Technology LLC provides a specific written warranty of fitness for a particular use, NuSil Technology LLC's sole warranty is that the product will meet NuSil Technology LLC's then current specification. NuSil Technology LLC specifically disclaims any other expressed or implied warranty, including warranties of merchantability and fitness for use. The exclusive remedy and NuSil Technology LLC's sole liability for breach of warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. NuSil Technology LLC expressly disclaims any liability for incidental or consequential damages